




180 Coil Trailer



Galvanized steel bars onto inner or outer location holes

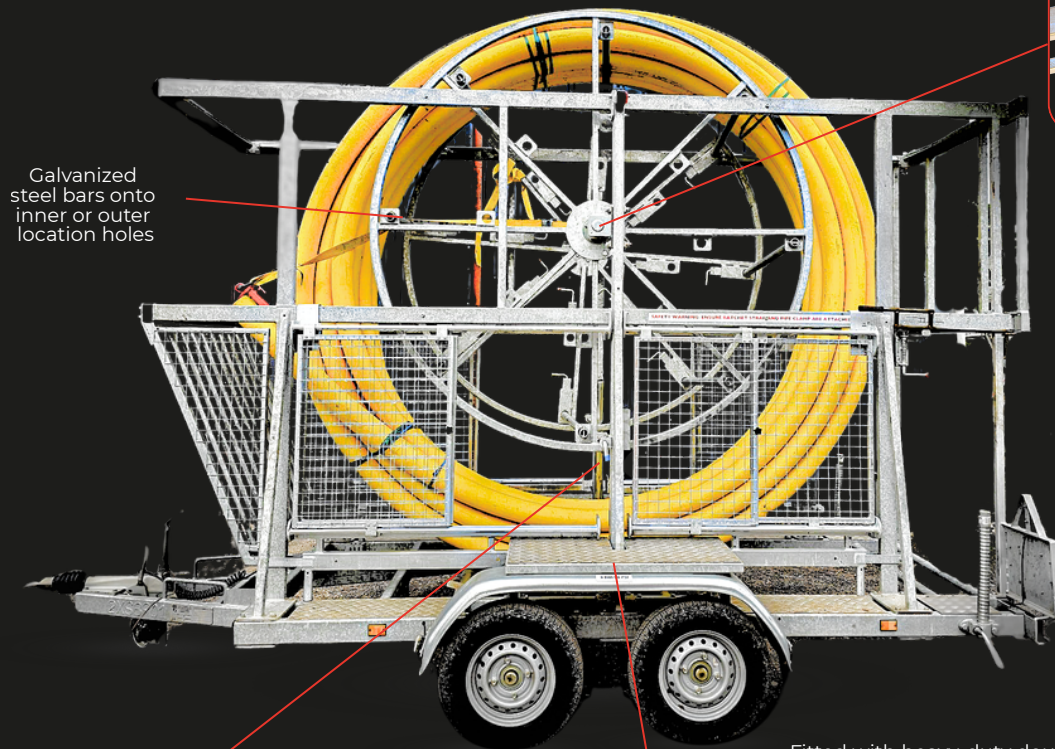

Eyelet on central spindle for ratchet strap




Spring shoot bolt and locking hole

New lightweight access point

Fitted with heavy-duty double axle independent suspension



GAS



WATER



NUCLEAR



CONTRACT SERVICES




SMARTESTER



HIRE



FUTURE ENERGY

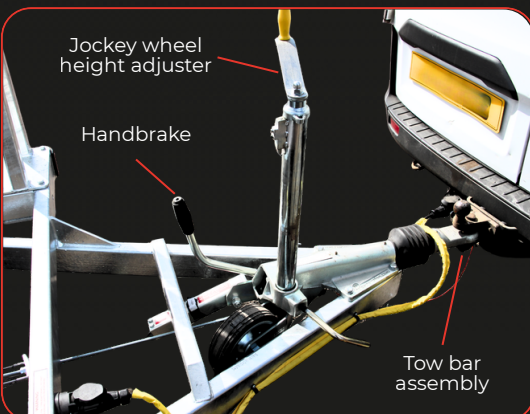


Jockey wheel height adjuster

Handbrake

Tow bar assembly

Pipe re-rounder/pipe end securer and dispenser

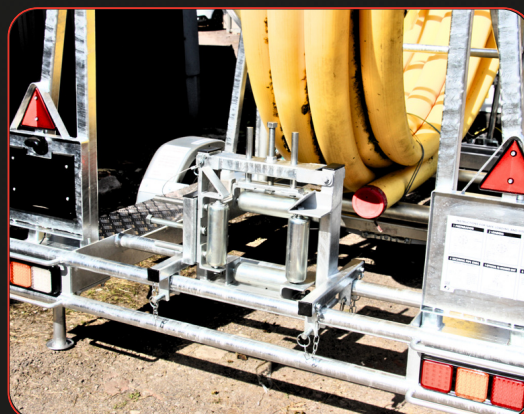

Instructions

- Apply handbrake, lower and secure prop stand
- Attach ratchet strap to eyelet on central spindle
- Remove drum bars on central spindle and open rear gate
- Roll PE vertically into position with end of coil positioned for dispensing—Large coils may need to be craned in
- Ensure both ends of the PE are secured:
 - Front end ratchet strapped to eyelet on spindle.
 - Dispensing end secured to fitted pipe end re-rounder/dispenser
- Close and secure rear gate
- Position spindle wheel(s) so that locking holes on either side line up
- Begin re-attaching drum bars individually—this can be safely achieved by partially rotating spindle wheel to gain access to the next drum bar hole.
- When all (or as many as possible) drum bars are securely attached lock spring shoot bolts through locking holes
- Ensure tow bar assembly is currently and safely linked up to vehicle
- Follow guidelines found on trailer for dispensing of coil

Coil Carry Capacity		
Maximum Coil Outside Diameter		4.21m
Minimum Coil Inside Diameter		0.8m
Maximum Coil Width		1.0m
The following currently available coil lengths can be handled by 180 trailer		
63mm, 75mm SDR11/17(10 Bar)		All sizes
90mm SDR17.6 (6 Bar)		Up to 200m
110, 125mm SDR11 or SDR 17.6		Up to 150m
140, 160 180 SDR17.6 and 180 SDR11		Up to 100m
Trailer Dimensions	Unloaded	Loaded with 4.21m O.D. Coil
Overall Length	5m	5m
Overall Width	2.3m	2.3m
Overall Height	3.4m	4.5m
Trailer Weight		
Un-laden (Design Weight)		1020kg
Maximum Gross Weight		2600kg
Maximum Payload		1580kg



Steve Vick International Ltd UK HQ:
 Greenwood Industrial Estate,
 Bradford on Avon, Wiltshire, BA15 2AU

+44 (0) 1225 864 864
stevevick.com

