




50/90 Coil Trailer

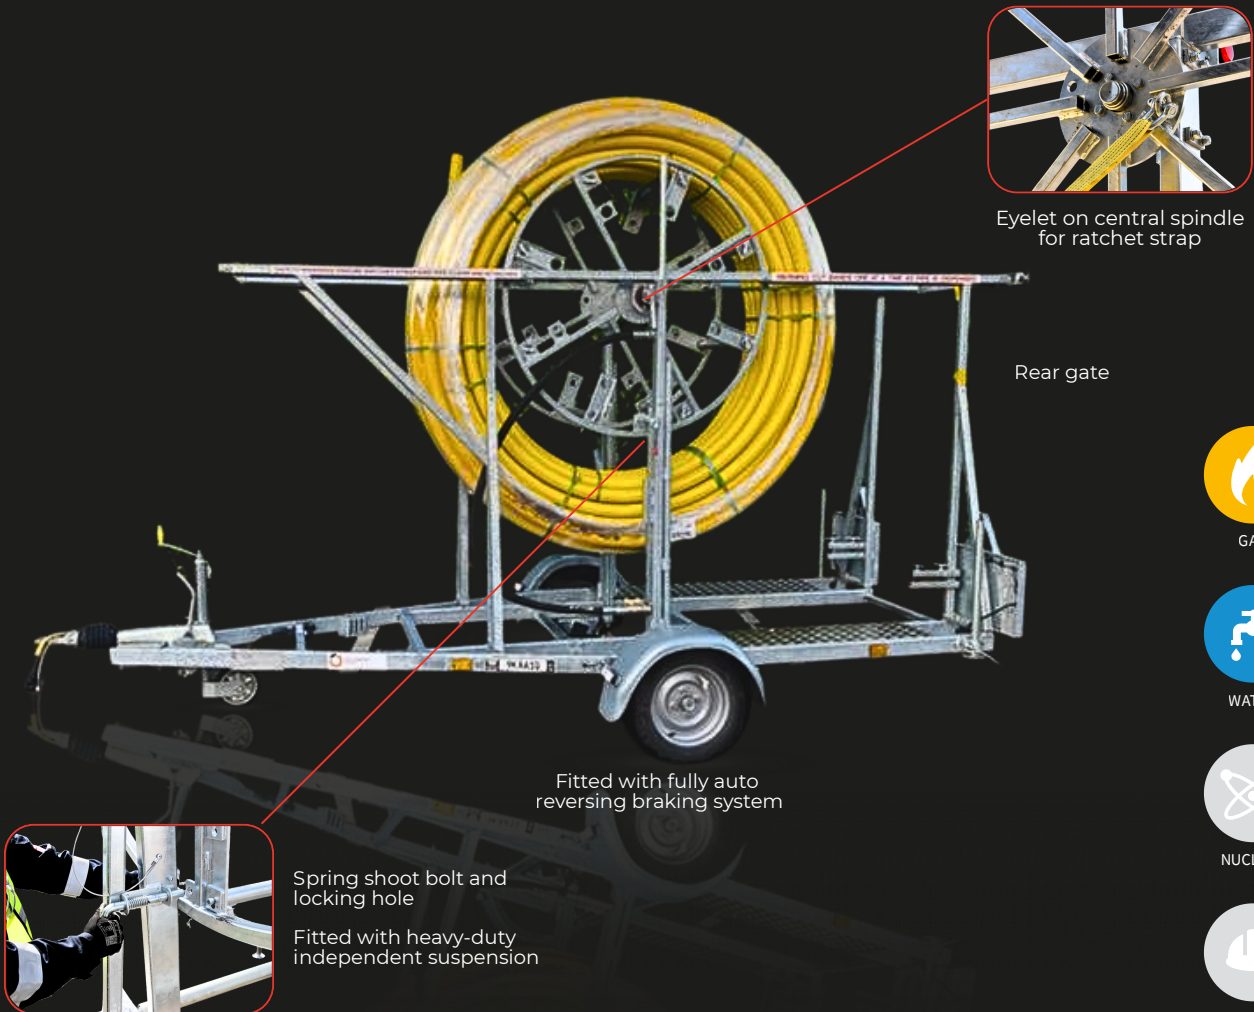

Eyelet on central spindle
for ratchet strap

Rear gate


Fitted with fully auto
reversing braking system



Spring shoot bolt and
locking hole
Fitted with heavy-duty
independent suspension



GAS



WATER



NUCLEAR



CONTRACT
SERVICES




SMARTESTER



HIRE




FUTURE
ENERGY

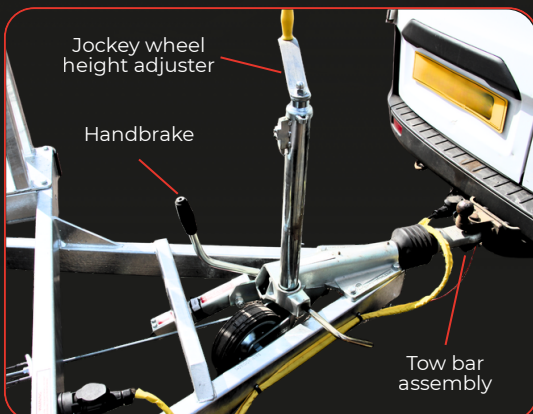

Jockey wheel
height adjuster

Handbrake

Tow bar
assembly

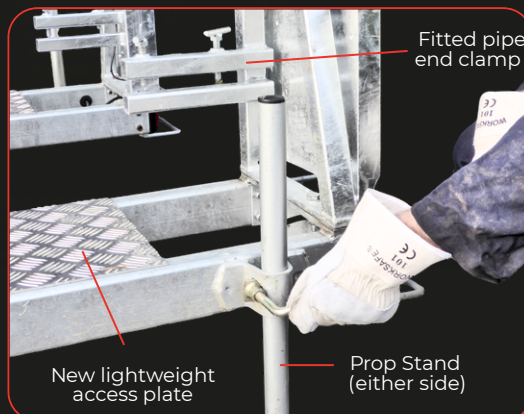

Fitted pipe
end clamp

New lightweight
access plate

Prop Stand
(either side)

Instructions

- Apply Handbrake, lower and secure prop stands
- Attach ratchet strap to eyelet on central spindle
- Remove drum bars on central spindle and open rear gate
- Roll PE vertically into position with end of coil positioned for dispensing - Large coils may need to be craned in
- Ensure both ends of the PE are secured:
 - Front end ratchet strapped to eyelet on spindle
 - Dispensing end secured to fitted pipe end clamp
- Close and secure rear gate
- Position spindle wheel(s) so that locking holes on either side line up
- Begin re-attaching drum bars individually - this can be safely achieved by partially rotating spindle wheel to gain access to the next drum bar hole
- To make spindle and coil rotation easier and safer use extension arm which slots over spindle stump to increase fulcrum
- When all (or as many as possible) drum bars are securely attached lock spring shoot bolts through locking holes
- Ensure tow bar assembly is correctly and safely linked up to vehicle
- Follow guidelines found on trailer for dispensing of coil

Coil Carry Capacity		
Maximum Coil Outside Diameter		3.3m
Minimum Coil Inside Diameter		1.2m
Maximum Coil Width		0.55m
The following currently available coil lengths can be handled by 50/90 trailer		
40mm, 55mm, 63mm, 75mm, 90mm SDR11 (10 Bar)		Up to 150m
90mm SDR17.6 (6 Bar)		Up to 100m
125mm SDR11 or SDR 17.6		Up to 50m
Trailer Dimensions	Unloaded	Loaded with 3.3m O.D. Coil
Overall Length	4.20m	4.20m
Overall Width	1.92m	1.92m
Overall Height	2.44m	3.50m
Trailer Weight		
Un-laden (Design Weight)		420kg
Maximum Gross Weight		750kg
Maximum Payload		330kg



Steve Vick International Ltd UK HQ:
 Greenwood Industrial Estate,
 Bradford on Avon, Wiltshire, BA15 2AU

+44 (0) 1225 864 864
stevevick.com

