

# Rapid Rotary Cutter


*Circumferential cutters specifically designed to cut either ductile/cast iron mains or steel mains up to 300mm (12") in diameter. An NIA development project with Wales & West Utilities, approved by all UK gas distribution networks.*

The Rapid Rotary Cutter offers a solution to the problems associated with making circumferential cuts on ductile iron pipes.

The Rapid Rotary Cutter is an air powered tool designed to cut around a ductile iron main. It is extremely fast, cutting a 4" main in approximately 2 minutes. Incorporating depth gauges, the cutter is safe to use on inserted host pipes and allows immediate access.

The Rapid Rotary Cutter comprises two aluminium shells, with an air motor on the top shell, that interlink around the perimeter of the main. Using minimum effort, the operator rotates the unit 360° by hand, to give a very precise circumferential cut.

The Rapid Rotary Cutter is the ideal tool for circumferential cuts during both live and dead insertion. Ideal for the 'golden' cut against flowstopping bags on ductile, cast/spun iron and steel mains and is fully approved in all GDN's.

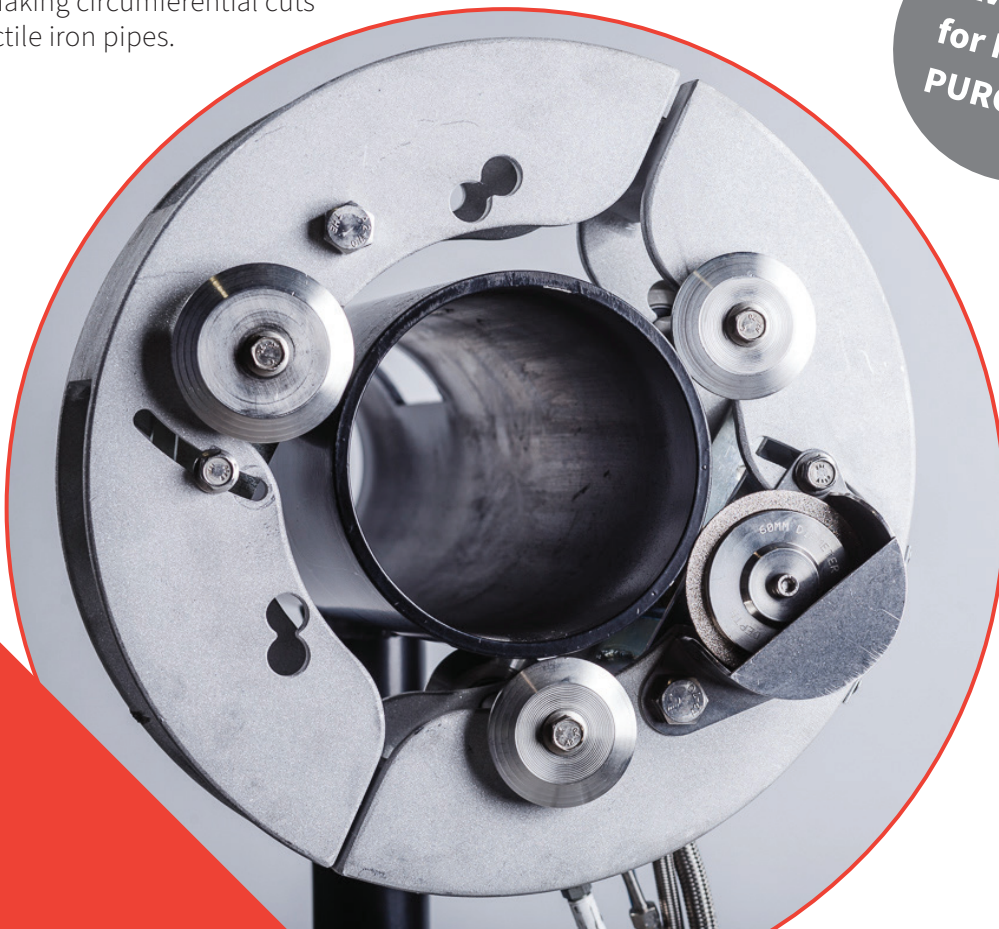

Available  
for HIRE or  
PURCHASE



GAS



WATER



NUCLEAR



CONTRACT  
SERVICES



SMARTESTER




HIRE



FUTURE  
ENERGY

## Benefits

- **Speed - extremely quick cutting time. Approximately 2 mins to cut a (4") ductile main and 6 mins to cut a 4" steel main**
- **Versatile- ideal for use in both live mains insertion and dead insertion projects**
- **Quick assembly - the two shells can be connected over the main in seconds**
- **Adaptable - One unit for all five sizes using different frames; 75mm/100mm, 150mm and 200mm, 250mm and 300mm (3"/4", 6",8" 10" and 12")**
- **Ease of use - Compact, lightweight and simple to use - one man operation**
- **Convenient - Needs smaller trench than traditional cutters - less than 10cm clearance needed around the main**
- **Safety - The cutting blade is mounted away from operator's hand**
- **Precise - Depth control discs prevent damage to inserted PE**
- **Water line incorporated to prevent, sparking and suppress dust (full PPE including face masks must be worn)**

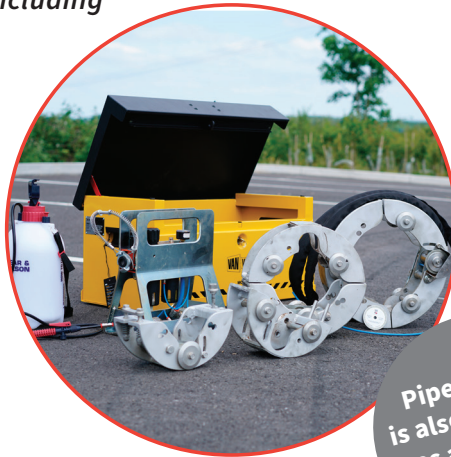

Pipe Cutting  
is also available  
as a Contract  
Service



## Technical specifications

Required clearance: 100mm (4")

Pipe diameter range: 75mm - 300mm (3"-12")

Maximum pipe wall thickness: 13mm

Typical cutting time: 2 to 10 minutes depending on size of main

Width: 290mm (11") to 550mm (22") depending on size of RRC

Length: 171mm (7")

Weight: 10 to 18kg - depending on size of RRC

## About Steve Vick International

**We are experts in innovative engineering for trenchless renovation and decommissioning of pipes worldwide.**

Since our foundation in 1981, we have been dedicated to delivering cost-saving solutions for damaged, redundant or outdated underground pipe work. We are at the forefront in developing products and techniques across gas, water, nuclear and contract service sectors on a worldwide basis.

We are proud of our reputation for innovative product development, strong technical support and after sales care.

For more information on any of the products and services featured here, please contact: [info@stevevick.com](mailto:info@stevevick.com)



Steve Vick International Ltd  
UK HQ: Treewood Industrial Estate  
Bradford on Avon, Wiltshire BA15 2AU

+44 (0) 1225 864 864  
[stevevick.com](http://stevevick.com)

