




CoilControl™

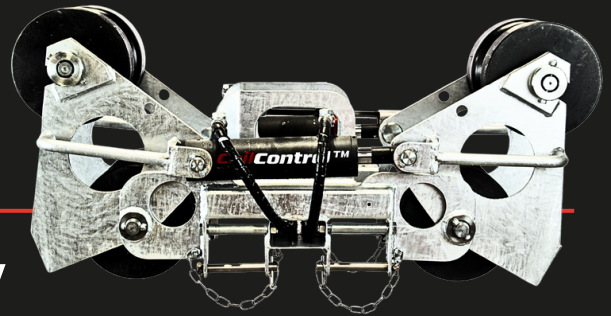

CoilControl is a pipe installation device specifically engineered with safety as a top priority, designed to minimise the inherent dangers associated with handling and dispensing coiled pipe.

CoilControl was specifically designed for the 180 Pipe Coil Trailer, but it is also compatible with all Pipe Coil Trailers.

This versatile device handles pipe diameters ranging from 63mm to 180mm, ensuring a safer, more efficient pipeline installation process. CoilControl can be easily fitted to the rear of the trailer on site, allowing for quick installation and setup. Its design permits easy interchangeability across the different SVI trailer models, ensuring time efficiency and flexibility for your projects. With CoilControl, you can significantly enhance the safety and efficiency of your pipeline installations, reducing risks and improving operational productivity.

Elimination of Dangerous Stored Energy: CoilControl removes the stored energy from the pipe, mitigating health and safety risks for site operatives and the public.

Stable Pipe Handling: The device ensures the pipe is stable on the coil trailer, feeding directly to the floor, thereby reducing manual handling and lifting for operatives.

Accelerated Installation: CoilControl enables the faster installation of coiled pipe compared to traditional stick methods, increasing the likelihood of meeting project deadlines.

Quick Connections Work: Reduces the time required for necessary connections work, minimising disruption to customers and traffic.


Cost-Efficiency: Achieve significant cost savings due to faster installation and reduced need for excavation and backfill.

Versatile Pipe Handling: Compatible with pipe diameters from 63mm to 180mm, making it suitable for a wide range of applications.

Innovative Roller System: Utilises two pairs of conical rollers at the rear of the trailer to neutralise stored energy, rendering the pipe inert and safe.




GAS




WATER




NUCLEAR



CONTRACT SERVICES



SMARTESTER



HIRE



FUTURE ENERGY

Product Details

Adjustable Straightening Pressures:

Easily adapt to different ambient temperatures and pipe SDRs, providing flexibility for various working conditions.

Environmentally Friendly:

Use only the necessary amount of coiled pipe per project; the device can be stopped and removed, allowing the remaining pipe to be used in future projects.

Minimised Distortion:

Dual conical rollers are designed to minimise circumferential distortion, maintaining the integrity of the pipe.

Easy Installation and Operation:

CoilControl can be quickly fitted to the trailer on-site and operated using a manually operated hydraulic pump.

Advantages Over Stick Pipe Installation

Reduced Excavation Needs:

Coiled pipe installation requires fewer excavations, leading to faster backfill and reinstatement activities.

Less Welding:

Continuous coiled pipe minimises the need for welding sections together, reducing the risk of failure and improving installation efficiency.

TECHNICAL SPECIFICATIONS

Height (mm): 500mm

Length (mm): 1,000mm

Weight (kg): Approx 80kg (excluding pump)

Width (mm): 500mm

Max Hydraulic Pressure: 200 bar

PE Sizes: 63mm - 180mm

Functions: Coil stored energy reduction & aid to pipe straightening

Hydraulic Fittings: BSP

Power Source: Manual hydraulic pump

"Coil Control will significantly improve the safety of our operators handling coiled PE pipe. By neutralising the pipe's stored energy, it has addressed a long-standing risk in the industry. The 180 Pipe Coil Trailer with Coil Control offers us greater flexibility as we move forward with RIIO-3 and the continuation of the Iron Mains Replacement Programme in the North West."

Adam Hassall, Innovation Specialist at

Cadent
Your Gas Network



Steve Vick International Ltd UK HQ:
Treenwood Industrial Estate,
Bradford on Avon, Wiltshire BA15 2AU

+44 (0) 1225 864 864
stevevick.com

